

---

## HALOLUX T

Halogen lamps for refrigerators



---

### Areas of application

- Domestic refrigerators

---

### Product benefits

- Compact dimensions
- UV filter
- Contains no mercury

---

### Product features

- Average life: 2,000 h
- 100 % dimmable



# Product family datasheet

## Technical data



Product description	Electrical data					Photometrical data			Light technical data	
	Nominal wattage	Nominal voltage	Rated luminous flux	Rated wattage	Power factor $\lambda$	Nominal luminous flux	Color temperature	Color rendering index Ra	Starting time	Warm-up time (60 %)
HALOLUX T 25 W 230 V E14	25.0 W	230 V	260 lm	25.00 W	1.00	260 lm	2700 K	100	0.0 s	0.00 s
HALOLUX T 40 W 230 V E14	40.0 W	230 V	490 lm	40.00 W	1.00	490 lm	2700 K	100	0.0 s	0.00 s
HALOLUX T 60 W 230 V E14	60.0 W	230 V	820 lm	60.00 W	1.00	820 lm	2800 K	100	0.0 s	0.00 s

Product description	Dimensions & weight			Lifespan				Additional product data		
	Diameter	Overall length	Light center length (LCL)	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Base (standard designation)	Lamp mercury content	Mercury-free
HALOLUX T 25 W 230 V E14	26.0 mm	80.0 mm	55.0 mm	2000 h	2000 h	50000 <sup>1)</sup>	0.80	E14	0.0 mg	Yes
HALOLUX T 40 W 230 V E14	26.0 mm	80.0 mm	55.0 mm	2000 h	2000 h	50000 <sup>1)</sup>	0.80	E14	0.0 mg	Yes
HALOLUX T 60 W 230 V E14	26.0 mm	80.0 mm	55.0 mm	2000 h	2000 h	50000 <sup>1)</sup>	0.80	E14	0.0 mg	Yes

Product description	Capabilities		Certificates & standards		Country specific categorizations
	Burning position	Dimmable	Energy efficiency class	Energy consumption	ILCOS
HALOLUX T 25 W 230 V E14	Any	Yes	D	25 kWh/1000h	HSGST/C/UB-25-230-E14-55
HALOLUX T 40 W 230 V E14	Any	Yes	D	40 kWh/1000h	HSGST/C/UB-40-230-E14-55
HALOLUX T 60 W 230 V E14	Any	Yes	D	60 kWh/1000h	HSGST/C/UB-60-230-E14-55

<sup>1)</sup> At 1 min on / 3 min off

## Product family datasheet

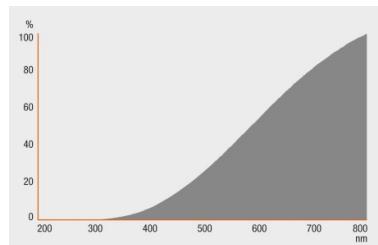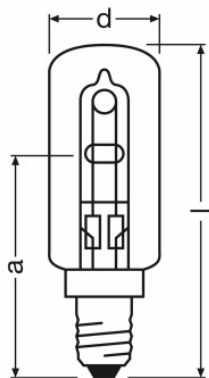

HALOLUX T 25 W 230 V E14,  
 HALOLUX T 40 W 230 V E14,  
 HALOLUX T 60 W 230 V E14

HALOLUX T 25 W 230 V E14,  
 HALOLUX T 40 W 230 V E14,  
 HALOLUX T 60 W 230 V E14

### Application advice

For more detailed application information and graphics please see product datasheet.

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300500942	HALOLUX T 25 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 140 mm	3.94 dm <sup>3</sup>	520.50 g
4050300363707	HALOLUX T 40 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 140 mm	3.94 dm <sup>3</sup>	520.50 g

## Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300331638	HALOLUX T 60 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 156 mm	4.39 dm <sup>3</sup>	463.20 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.