

---

## HALOPAR 30

Halogen lamps with parabolic reflector PAR30, with screw base



---

### Areas of application

- General illumination
- Workplace lighting
- Kitchen lighting
- Object lighting
- Accent lighting
- Shops
- Restaurants, hotels and similar prestigious applications

---

### Product benefits

- Brilliant accent light
- With whole glass reflector for brilliant lighting effects
- Instant 100 % light, no warm-up time
- Approved for use in open luminaires (to IEC 60598-1)
- Contains no mercury
- UV filter

---

### Product features

- Average life: 2,000 h
- 100 % dimmable
- Perfect color rendering ( $R_a$ : 100)
- Color temperature: 2,900 K

# Product family datasheet

## Technical data

Product description	Electrical data				Photometrical data		Light technical data			Dimensions & weight	
	Nominal wattage	Nominal voltage	Rated wattage	Power factor $\lambda$	Color temperature	Color rendering index Ra	Beam angle	Starting time	Warm-up time (60 %)	Diameter	Overall length
HALOPAR 30 75 W 230 V 10° E27 <sup>1)</sup>	75.0 W	230 V	75.00 W	1.00	2900 K	100	10 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 240 V 10° E27 <sup>1)</sup>	75.0 W	240 V	75.00 W	1.00	2900 K	100	10 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	75.0 W	230 V	75.00 W	1.00	2900 K	100	30 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	75.0 W	240 V	75.00 W	1.00	2900 K	100	30 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	75.0 W	230 V	75.00 W	1.00	2900 K	100	30 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	75.0 W	240 V	75.00 W	1.00	2900 K	100	30 °	0.0 s	0.00 s	97.0 mm	90.5 mm
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	75.0 W	230 V	75.00 W	1.00	2900 K	100	30 °	0.0 s	0.00 s	97.0 mm	90.5 mm

Product description	Lifespan				Additional product data			Capabilities	
	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Base (standard designation)	Lamp mercury content	Mercury-free	Burning position	Dimmable
HALOPAR 30 75 W 230 V 10° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 240 V 10° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	2000 h	2000 h	50000 <sup>2)</sup>	0.75	E27	0.0 mg	Yes	Any	Yes


Product description	Certificates & standards		Country specific categorizations
	Energy efficiency class	Energy consumption	ILCOS
HALOPAR 30 75 W 230 V 10° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-230-E27-97/10

# Product family datasheet

Product description	Certificates & standards		Country specific categorizations
	Energy efficiency class	Energy consumption	ILCOS
HALOPAR 30 75 W 240 V 10° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-240-E27-97/10
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-240-E27-97/30
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-240-E27-97/30
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-230-E27-97/30
HALOPAR 30 75 W 240 V 30° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-240-E27-97/30
HALOPAR 30 75 W 230 V 30° E27 <sup>1)</sup>	D	75 kWh/1000h	HAGS/UB-75-230-E27-97/30

<sup>1)</sup> Not suitable for outdoor use or damp conditions/Banned from 1.9.2016 as per EU phase-out plan

<sup>2)</sup> At 1 min on / 3 min off

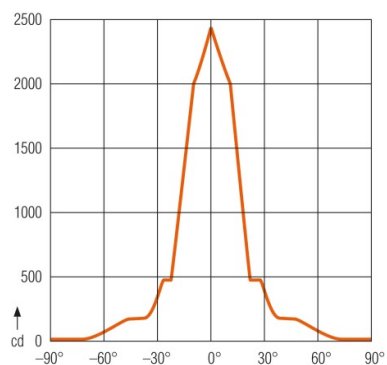

HALOPAR 30 75 W 230 V 30° E27

## Product family datasheet

### Application advice

For more detailed application information and graphics please see product datasheet.

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300338460	HALOPAR 30 75 W 230 V 10° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm <sup>3</sup>	3480.00 g
4050300435343	HALOPAR 30 75 W 240 V 10° E27	Shipping carton box 15	521 mm x 113 mm x 336 mm	19.78 dm <sup>3</sup>	3480.00 g
4050300338484	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm <sup>3</sup>	3540.00 g
4050300435367	HALOPAR 30 75 W 240 V 30° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm <sup>3</sup>	3540.00 g
4050300338507	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	521 mm x 193 mm x 336 mm	33.79 dm <sup>3</sup>	3540.00 g
4050300435404	HALOPAR 30 75 W 240 V 30° E27	Shipping carton box 15	521 mm x 172 mm x 336 mm	30.11 dm <sup>3</sup>	3480.00 g
4008321207999	HALOPAR 30 75 W 230 V 30° E27	Shipping carton box 15	525 mm x 175 mm x 340 mm	31.24 dm <sup>3</sup>	3927.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For light distribution curves see

## Product family datasheet

▶ [www.osram.com](http://www.osram.com)

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.