
HALOPIN PRO

Halogen lamps with G9 base



Areas of application

- General illumination
- Workplace lighting
- Lighting for reading
- Dining table lighting
- Mirror lighting
- Accent lighting
- Mood lighting

Product benefits

- Brilliant accent lighting
- Incredibly small dimensions for revolutionary new luminaire designs
- Robust filament design thanks to innovative, unique bulb pinch technology
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Complies with IEC 60432-2 thanks to integrated fuse function
- Lower thermal output (compared with the standard reference product)
- The lamp shuts down reliably
- Contains no mercury

Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index R_a : 100

Product family datasheet

Technical data

Product description	Electrical data						Photometrical data		
	Nominal wattage	Nominal voltage	Rated luminous flux	Rated wattage	Claimed equiv. conventional lamp power	Power factor λ	Nominal luminous flux	Color temperature	Color rendering index Ra
HALOPIN PRO 20 W 230 V G9	20.0 W	230 V	235 lm	20.00 W	25 W	1.00	235 lm	2700 K	100
HALOPIN PRO 20 W 240 V G9	20.0 W	240 V	235 lm	20.00 W	25 W	1.00	235 lm	2700 K	100
HALOPIN PRO 33 W 230 V G9	33.0 W	230 V		33.00 W	40 W		460 lm	2700 K	100
HALOPIN PRO 33 W 240 V G9	33.0 W	240 V	460 lm	33.00 W	40 W	1.00	460 lm	2700 K	100
HALOPIN PRO 48 W 230 V G9	48.0 W	230 V	740 lm	48.00 W	60 W		740 lm	2800 K	100
HALOPIN PRO 48 W 230 V G9	48.0 W	240 V	740 lm	48.00 W	60 W	1.00	740 lm	2800 K	100
HALOPIN PRO 60 W 230 V G9	60.0 W	230 V	980 lm	60.00 W	75 W	1.00	980 lm	2800 K	100
HALOPIN PRO 60 W 240 V G9	60.0 W	240 V	980 lm	60.00 W	75 W	1.00	980 lm	2800 K	100



Product description	Light technical data		Dimensions & weight			Lifespan				Additional product data
	Starting time	Warm-up time (60 %)	Diameter	Light center length (LCL)	Overall length	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Base (standard designation)
HALOPIN PRO 20 W 230 V G9	0.0 s	0.00 s	14.0 mm	22.0 mm	43.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9
HALOPIN PRO 20 W 240 V G9	0.0 s	0.00 s	14.0 mm	22.0 mm	43.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9
HALOPIN PRO 33 W 230 V G9	0.0 s		14.0 mm	22.0 mm	43.0 mm	2000 h	2000 h	50000 ¹⁾		G9
HALOPIN PRO 33 W 240 V G9	0.0 s		14.0 mm	22.0 mm	43.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9
HALOPIN PRO 48 W 230 V G9	0.0 s		14.0 mm	22.0 mm	46.1 mm	2000 h	2000 h	50000 ¹⁾		G9
HALOPIN PRO 48 W 230 V G9	0.0 s	0.00 s	14.0 mm	22.0 mm	46.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9
HALOPIN PRO 60 W 230 V G9	0.0 s	0.00 s	14.0 mm	22.0 mm	46.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9
HALOPIN PRO 60 W 240 V G9	0.0 s	0.00 s	14.0 mm	22.0 mm	46.0 mm	2000 h	2000 h	50000 ¹⁾	0.80	G9

Product family datasheet

Product description	Lamp mercury content	Mercury-free	Capabilities		Certificates & standards		Country specific categorizations
			Burning position	Dimmable	Energy efficiency class	Energy consumption	ILCOS
HALOPIN PRO 20 W 230 V G9	0.0 mg	Yes	Any	Yes	D	20 kWh/1000h	HSGST/C/UB-20-230-G9-22
HALOPIN PRO 20 W 240 V G9	0.0 mg	Yes	Any	Yes	D	20 kWh/1000h	HSGST/C/UB-20-240-G9-22
HALOPIN PRO 33 W 230 V G9	0.0 mg	Yes	Any	Yes	D	33 kWh/1000h	HSGST/C/UB-33-230-G9-22
HALOPIN PRO 33 W 240 V G9	0.0 mg	Yes	Any	Yes	D	33 kWh/1000h	HSGST/C/UB-33-240-G9-22
HALOPIN PRO 48 W 230 V G9	0.0 mg	Yes	Any	Yes	D	48 kWh/1000h	HSGST/C/UB-48-230-G9-22
HALOPIN PRO 48 W 230 V G9	0.0 mg	Yes	Any	Yes	D	48 kWh/1000h	HSGST/C/UB-48-240-G9-22
HALOPIN PRO 60 W 230 V G9	0.0 mg	Yes	Any	Yes	D	60 kWh/1000h	HSGST/C/UB-60-230-G9-22
HALOPIN PRO 60 W 240 V G9	0.0 mg	Yes	Any	Yes	D	60 kWh/1000h	HSGST/C/UB-60-240-G9-22

¹⁾ At 1 min on / 3 min off

Product family datasheet

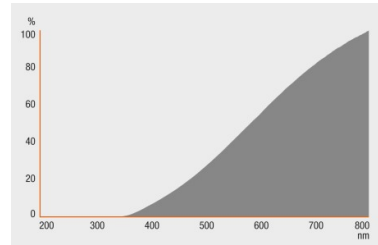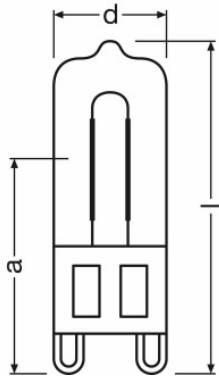

HALOPIN PRO 20 W 230 V G9,
HALOPIN PRO 20 W 240 V G9,
HALOPIN PRO 33 W 230 V G9,
HALOPIN PRO 33 W 240 V G9,
HALOPIN PRO 48 W 230 V G9,
HALOPIN PRO 48 W 230 V G9,
HALOPIN PRO 60 W 230 V G9,
HALOPIN PRO 60 W 240 V G9

HALOPIN PRO 20 W 230 V G9,
HALOPIN PRO 20 W 240 V G9,
HALOPIN PRO 33 W 230 V G9,
HALOPIN PRO 33 W 240 V G9,
HALOPIN PRO 48 W 230 V G9,
HALOPIN PRO 48 W 230 V G9,
HALOPIN PRO 60 W 230 V G9,
HALOPIN PRO 60 W 240 V G9

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321945273	HALOPIN PRO 20 W 230 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	126.00 g
4008321945273	HALOPIN PRO 20 W 230 V G9	Shipping carton box 200	266 mm x 238 mm x 153 mm	9.69 dm ³	970.00 g
4008321945556	HALOPIN PRO 20 W 240 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	141.80 g
4008321208668	HALOPIN PRO 33 W 230 V G9	Shipping carton box 20	144 mm x 64 mm x 118 mm	1.09 dm ³	136.00 g
4008321208668	HALOPIN PRO 33 W 230 V G9	Shipping carton box 200	266 mm x 238 mm x 153 mm	9.69 dm ³	970.00 g
4008321226341	HALOPIN PRO 33 W 240 V G9	Shipping carton box 20	144 mm x 70 mm x 106 mm	1.07 dm ³	128.00 g
4008321945334	HALOPIN PRO 48 W 230 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	132.00 g
4008321945617	HALOPIN PRO 48 W 230 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	145.33 g
4008321945372	HALOPIN PRO 60 W 230 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	132.00 g
4008321945655	HALOPIN PRO 60 W 240 V G9	Shipping carton box 20	144 mm x 55 mm x 118 mm	0.93 dm ³	132.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.